


Mobile line pump

BSF 1005 Moli

Output up to 52 m³/h
Delivery pressure up to 70 bar

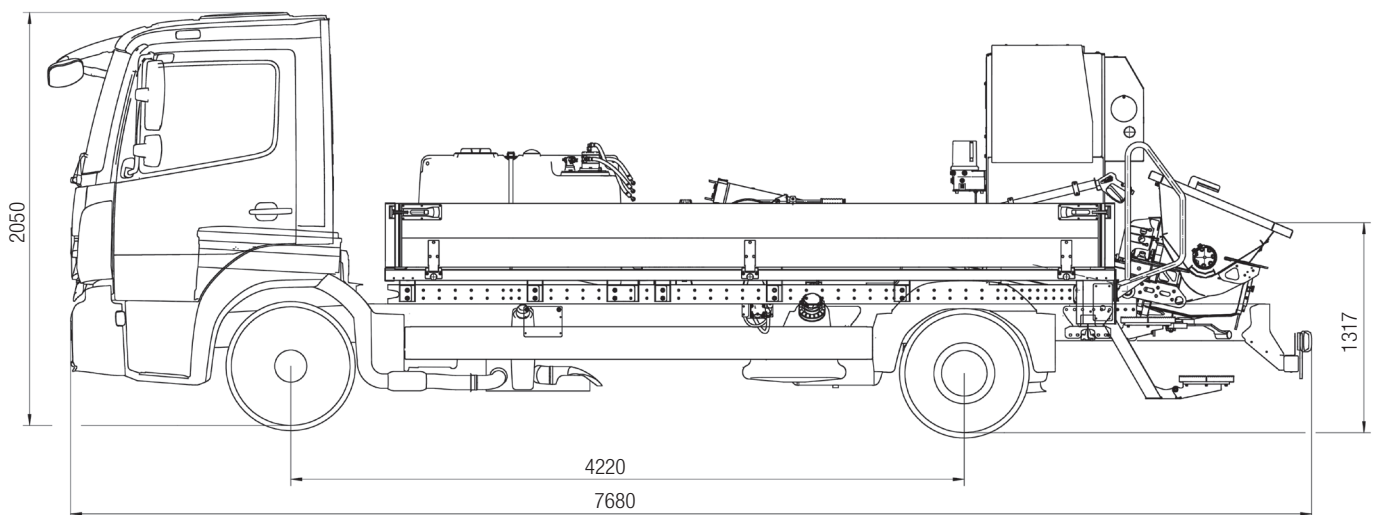

Dimensions and weights depend on the equipment. Technical changes and errors excepted.

Technical data

Pump	BSA 1005	
Delivery cylinder	Ø mm	180
Stroke	mm	1000
Output	m ³ /h	52
Delivery pressure	bar	70
Strokes	1/min.	33

All data maximum theoretical.

Serial delivery scope

Agitator safety switch off (RFID)	Operating manual certified (1x paper, 1x CD-ROM), spare part list
Cardan shaft maintenance free	Painting PM standard: Core pump RAL 7016, side panels MB1227 chrome yellow
Central lubrication hopper with hand lever	Platform non-skid
Chassis horn via stationary control station	Remote control with 10 m cable
Concrete hopper RS 488 with agitator	Rubber collar on concrete hopper
Concreting stop at idle speed	Side panel left/right foldable
Diagnostic interfaces central for electrical and hydraulic systems	Spectacle wear plate DURO 22
Delivery cylinder chrome-plated	Splash guard fixed
Delivery piston "Standard"	Steps left and right, galvanized
Engine speed remote adjustment	Tool set incl. standard equipment
EGD (Ergonic Graphic Display)	Water tank 700 l
EOC (Ergonic Output Control)	Working light for illumination of hopper, LED
Ergonic 3.0	
Flushing water pump 160 l/min 25 bar	

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.