


Rotor line pump

BQF 06 Roline

Output up to 58 m³/h
 Delivery pressure up to 25 bar

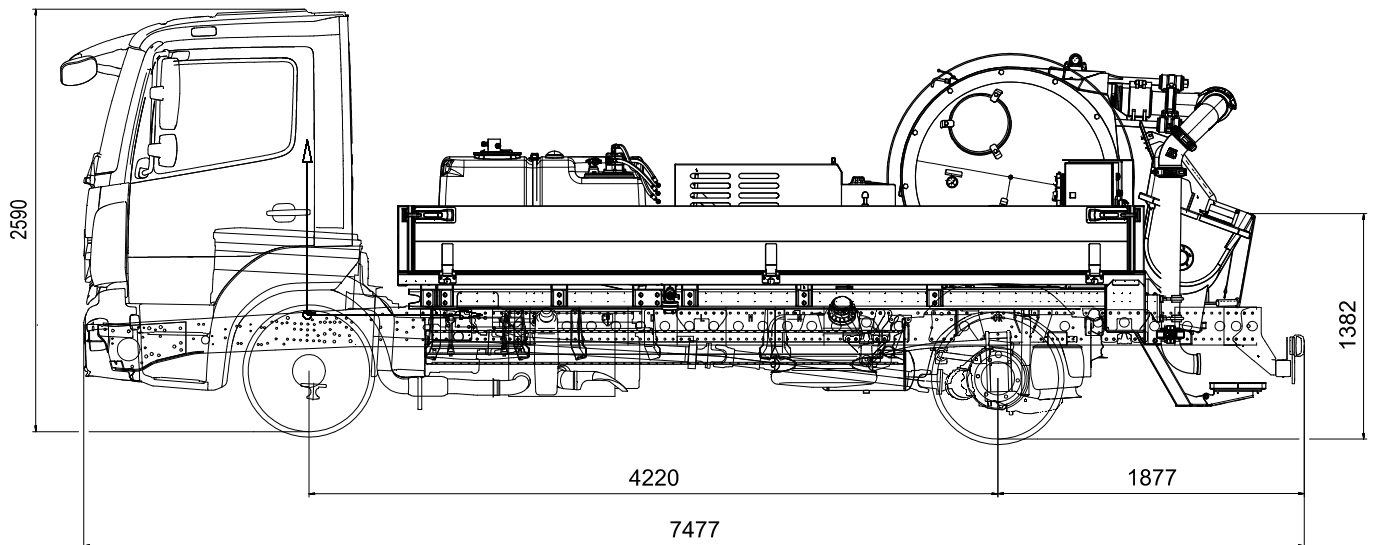

Note: Standard version. Dimensions and weights depend on truck, pump model and equipment.
 Dimensions in mm. For illustration only.

Technical data

Pump		R 65
Output	m ³ /h	58
Delivery pressure	bar	25
Rotor hose	Ø mm	125
Delivery line connection	Ø mm	100
Rotor speed	1/min	29

Delivery scope standard equipment

Agitator safety switch off (RFID)	Platform non-skid
Concrete hopper R65 400 l with agitator	Remote control without display, 10 m cable
Control cabinet with control point at rear left	Rotor pump R65
Flushing water pump 160 l/min 25 bar	Rubber collar on concrete hopper
Hopper cover, rubber	Side panel right/left foldable
Manual lubrication	Splash guard, fixed
Paintwork PM standard: core pump RAL 7016, side panels MB1227 chrome yellow	Tool set incl. standard equipment
	User manual / spare part list certified (1x Docu box, 1x CD-ROM)
	Water tank 700 l
	ZMS-K pump control

All data maximum theoretical.

See quotation for exact serial delivery scope.
 Comprehensive range of options available on request.