



Stationary concrete pump

BSA 1407 D4

Output up to 71 m³/h
Delivery pressure up to 106 bar

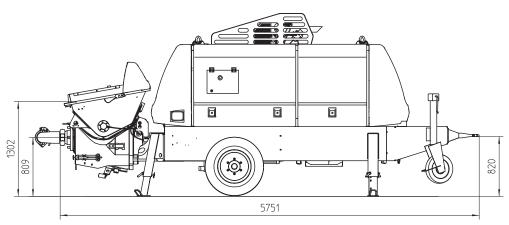



Note: Standard version. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 1407 D4
Material number		102408.000
Output	m³/h	71 / 47 *
Delivery pressure	bar	71 / 106 *
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		27 / 18 *
Engine power	kW	105
Hopper		RS 909
Capacity	1	ca. 600
Filling height	m	1.3
Transfer tube		S 2015 D
Line connection	mm	SK 125
Pressure connection	u	5.5
Control system		SPC-OPS
Weight	kg	4500

 $^{^{\}star}$ Values for hydraulic fluid being fed to piston-side All data maximum theoretical

Serial equipment

Agitator safety switch off	Operatir
Cable remote control 10 m	1× CD-l
Central lubrication on hopper with	Outrigge
hand lever press	Reduction
Cleaning accessories	SK 150
Coloring: Pump, frame, roof, tank and hood anthracite-grey	Speed d
Cover chrome yellow	Splash g
Concrete hopper with agitator	Support
Coupling ring (DIN)	Tool set
Drive diesel, Deutz 105 kW, Stage 4	Trailer F
Electronic error management	
Ergonic Graphic Display (EGD)	
Flushing water pump 50 I/min 20 bar	
Gate valve connection	
Grill 70 mm	

Operating manuals (1× paper, 1× CD-ROM) spare part list
Outriggers 4× mech.
Reduction bend 90°; SK 150 -> SK 125
Speed drawdown automatically on pump stop
Splash guard
Support wheel
Tool set incl. standard equipment
Trailer F8, travelling in site

See quotation for exact serial delivery scope. Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@pmw.de Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 1707