



Putzmeister

Your benefits

- Everything in view – convenient operation from one side
- New reinforced frame with insertion aid for worm parts and tool box
- Can be disassembled into handy assemblies without tools. Now also with forklift shoe, lifting eyes and carrying handles for easy and safe transport
- Conical mixing pipe for optimum material flow
- Large hopper with bag opener
- Water pump built in for constant water flow
- Compressor with pressure cut-off to work more safe
- Worm parts easy to change according to each application

MP 25 – Maximum efficiency for processing premixed dry mortar



- **Self levelling compound**
- **Calcium sulphate screed**



- **Exterior plaster**
(lime, lime cement and insulating plaster)
- **Interior plaster**
(gypsum/gypsum-lime plaster)



The new MP 25 mixer pumps are some of the most versatile machines on the market.


It handles all pumpable ready-mixed mortars such as ground coat plasters, adhesive mortars, reinforcement mortars, refractory mortars and texturing plasters etc. – both inside and outside.

Being a typical Putzmeister mixer pump, you can also completely disassemble the MP 25 with effortless ease. The modular groups can then be easily loaded into a car or carried up to the upper storey on the construction site. There the hoses are connected up and work can begin!


Your competent Putzmeister dealer will be happy to advise you on technical details and application issues.

Self levelling floor screed


Plaster/Fine plaster

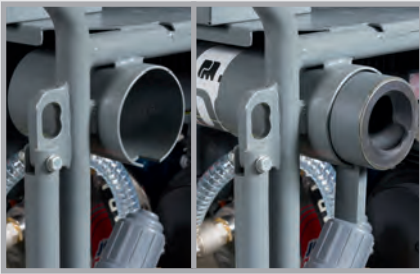

Both hands can be used to insert the rotor through the insertion aid.

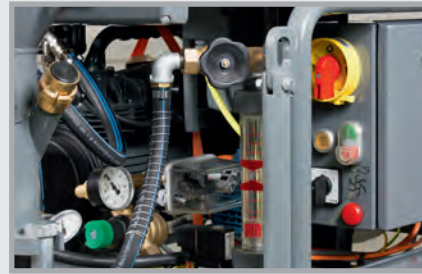

Comfortable operation – all operating and display elements are on one side. Everything always in view.

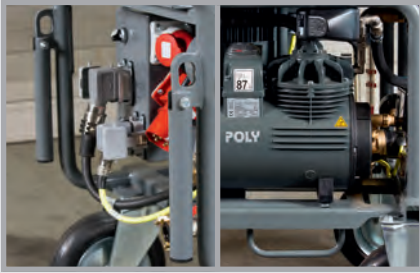

Easy to transport due to forklift shoe, lifting eyes and carrying handles.



Reinforced frame makes the MP 25 more robust and durable. The accessories have space in the new tool box.

Technical data

	MP 25	MP 25 Non-EU
Mixer drum	115 l	115 l
Delivery rate (theor.)*	25 l/min	40 l/min
Delivery pressure	40 bar	20 bar
Delivery range**	40 m horizontal, 15 m vertical	30 m horizontal, 15 m vertical
Air compressor	0,9 kW / 250 l/min	0,9 kW / 250 l/min
Worm pump	D6-3	D5 short
Engine	400 V / 50 Hz 5.5 kW at 385 rpm	400 V / 50 Hz 5.5 kW at 385 rpm
Drum drive	1.1 kW at 24 rpm	1.1 kW at 24 rpm
Water pump	0,37 kW at 3,6 m³/h	0.78 kW at 3.4 m³/m
Weight	273 kg	273 kg
Length x width x height	1344 x 728 x 1484 mm	1344 x 728 x 1484 mm
Filling height	984 mm	984 mm
Pressure connection	M35 / V 25–40	M35 / V 25–40
Maximum particle size	4 mm	4 mm
Special feature	Hose ID 25 for high-quality materials	Hose ID 35 for low-quality materials

* The delivery rate is theoretical and depends on the pump pressure.

** The data is based on experience and depends on the material properties.

Equipment

	MP 25	MP 25 Non-EU
Instruction manual with spare parts list	■	■
Insertion aid for worm parts	■	■
Compressor	■	■
Lifting eyes and carrying handles	■	■
Air hose 16 m	■	■
Mortar hose ID 25 15 m	■	
Mortar hose ID 35 13.3 m		■
Cleaning tool	■	■
Suction hose with filter		■
Spraygun ID 25	■	
Spraygun ID 35		■
Forklift shoe	■	■
Water pump, self-priming	■	■
Accessories ID 25	■	
Accessories ID 35		■
Insulating plaster attachment	<input type="checkbox"/>	<input type="checkbox"/>
Air injection hood	<input type="checkbox"/>	<input type="checkbox"/>
Cable remote control + extension	<input type="checkbox"/>	<input type="checkbox"/>
Tool box	■	<input type="checkbox"/>

Optional Standard

Putzmeister Mörtelmaschinen GmbH

Max-Eyth-Straße 10 · 72631 Aichtal / Germany
 P.O.Box 2152 · 72629 Aichtal / Germany
 Tel. +49 7127 599-0 · Fax +49 7127 599-743
 mm@putzmeister.com · www.putzmeister.com

